

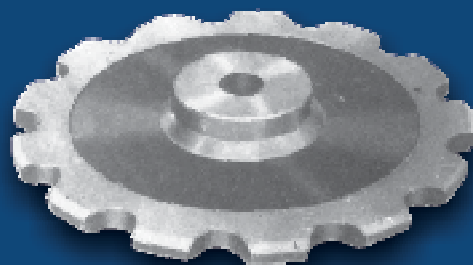


Meritt SPROCKETS

2014

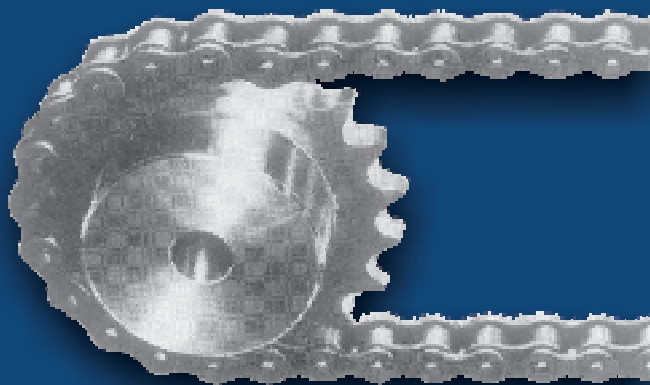

**The Driving Force
for Every Industry**

Meritt Transmissions is one of the leading manufacturers for Sprockets since last 25 years.

Our products are engineered for long trouble free service and are available in extensive range of types and sizes for convenient power transmissions.

Meritt Sprockets are well known for its cost effectiveness with reliability of quality, delivery and service.



- **AMERICAN STANDARD SPROCKETS**
- **BRITISH STANDARD SPROCKETS**
- **S.S SPROCKETS**
- **SPROCKETS FOR CONVEYOR CHAINS, ELEVATOR CHAINS & SPECIAL CHAINS**

SPROCKETS FOR TRANSMISSION CHAIN- BS228/ISO606/DIN 8187



Meritt offers a comprehensive range of stock sprockets for British Standard chain. The sprocket teeth are machined with the profile and shape according to the international standard.

Our standard series stock sprocket are available in mild steel from 3/8" pitch to 3" pitch, simplex/ duplex/ triplex, 8 Teeth to 150 Teeth; with one side boss (Type B) and pilot bore suitable for British Standard chain depending on the chain size. Dimensions specified below are of the more popular sizes of sprockets. Certified dimensions available on request.

SPROCKETS for 3/8" (06B), 1/2" (08B), 5/8" (10B) & 3/4" (12B)

SIMPLEX 3/8" PITCH					
No. Teeth	Bore		D _m	L	D _e
	d _{min}	d _{max}			
12	10	16	25	25	40
15	10	20	34	25	50
17	10	25	40	25	55
19	10	30	46	25	61
21	12	32	50	25	68
23	12	36	54	25	74
25	12	42	60	25	80
30	12	50	70	25	95
38	20	40	70	25	119
57	20	40	70	36	176
76	20	45	75	36	234
95	22	45	75	40	291
114	24	50	80	46	349
122	24	50	80	46	373

DUPLIX 3/8" PITCH					
No. Teeth	Bore		D _m	L	D _e
	d _{min}	d _{max}			
12	10	16	25	30	40
15	12	20	34	30	50
17	12	27	40	30	55
19	12	30	46	30	61
21	16	35	52	30	68
23	16	40	58	30	74
25	16	45	64	30	80
30	16	60	79	30	95
38	24	50	80	30	119
57	24	50	80	40	176
76	24	55	90	44	234
95	26	55	90	46	291
114	30	65	100	50	349
122	30	65	100	50	373

TRIPLEX 3/8" PITCH					
No. Teeth	Bore		D _m	L	D _e
	d _{min}	d _{max}			
12	12	16	25	40	40
15	12	20	34	40	50
17	12	27	40	40	55
19	12	30	46	40	61
21	16	35	52	40	68
23	16	40	58	40	74
25	16	45	64	40	80
30	16	60	79	40	95
38	28	50	80	40	119
57	28	60	94	40	176
76	30	65	100	48	234
95	30	65	100	52	291
114	36	75	116	58	349
122	36	75	116	58	373

SIMPLEX 1/2" PITCH					
No. Teeth	Bore		D _m	L	D _e
	d _{min}	d _{max}			
12	10	19	33	28	54
15	10	30	45	28	66
17	12	35	54	28	74
19	12	40	60	28	82
21	15	50	68	28	91
23	15	50	70	28	99
25	15	50	70	28	107
30	16	60	80	28	127
38	20	45	75	38	159
57	20	45	75	40	235
76	24	60	90	46	312
95	26	70	100	46	388
114	26	70	100	40	465
122	28	70	100	50	498

DUPLIX 1/2" PITCH					
No. Teeth	Bore		D _m	L	D _e
	d _{min}	d _{max}			
12	12	20	35	38	54
15	12	30	44	38	66
17	16	37	52	38	74
19	16	40	60	38	82
21	16	50	68	38	91
23	16	55	75	40	99
25	16	65	84	40	107
30	20	80	100	40	127
38	26	55	88	46	159
57	26	55	90	50	235
76	30	65	100	50	312
95	32	70	112	50	388
114	32	70	112	50	465
122	32	70	112	50	498

TRIPLEX 1/2" PITCH					
No. Teeth	Bore		D _m	L	D _e
	d _{min}	d _{max}			
12	16	20	35	50	54
15	16	30	46	50	66
17	16	37	52	50	74
19	16	40	60	50	82
21	20	50	68	50	91
23	20	55	75	55	99
25	20	65	84	55	107
30	20	80	100	55	127
38	30	65	96	55	159
57	30	65	100	58	235
76	36	75	116	64	312
95	36	80	124	72	388
114	36	80	124	78	465
122	36	80	124	80	488

SIMPLEX 5/8" PITCH					
No. Teeth	Bore		D _m	L	D _e
	d _{min}	d _{max}			
12	12	28	42	30	68
15	12	35	56	30	84
17	12	46	60	30	93
19	12	50	70	30	103
21	16	55	75	30	114
23	16	55	80	30	124
25	16	55	80	30	134
30	20	65	90	35	159
38	24	50	78	42	199
57	24	50	80	46	295
76	26	55	90	54	390
95	28	60	94	60	486
114	30	65	100	70	582
122	30	65	100	75	623

DUPLIX 5/8" PITCH					
No. Teeth	Bore		D _m	L	D _e
	d _{min}	d _{max}			
12	16	30	44	45	68
15	16	40	56	45	84
17	16	48	67	45	93
19	16	55	76	45	103
21	20	60	85	45	114
23	20	70	95	45	124
25	20	80	105	45	134
30	25	90	120	45	159
38	30	65	96	52	199
57	30	65	100	58	295
76	32	70	112	66	390
95	36	80	124	74	486
114	38	90	138	80	582
122	40	90	138	85	623

TRIPLEX 5/8" PITCH					
No. Teeth	Bore		D _m	L	D _e
	d _{min}	d _{max}			
12	16	30	44	60	68
15	16	40	59	60	84
17	16	48	67	60	93
19	16	55	76	60	103
21	20	60	85	60	114
23	20	70	95	60	124
25	20	80	105	60	134
30	25	90	120	60	159
38	36	70	106	56	199
57	36	75	116	66	295
76	36	85	128	74	390
95	40	90	138	80	486
114	44	100	152	90	582
122	45	100	152	95	623


SIMPLEX 3/4" PITCH					
No. Teeth	Bore		D _m	L	D _e
	d _{min}	d _{max}			
12	12	35	52	32	82
15	12	46	65	32	100
17	16	52	75	32	112
19	16	60	80	32	124
21	20	60	83	32	138
23	20	45	70	32	150
25	20	45	70	32	161
30	25	50	80	40	192
38	26	60	90	50	240
57	28	60	94	54	354
76	30	65	100	62	469
95	32	70	112	70	584
114	36	75	116	76	700
122	38	80	124	80	748

DUPLIX 3/4" PITCH					
No. Teeth	Bore		D _m	L	D _e
	d _{min}	d _{max}			
12	20	35	53	50	82
15	20	48	68	50	100
17	20	55	79	50	112
19	20	65	91	50	124
21	25	70	97	50	138
23	25	80	110	50	150
25	25	90	120	50	161
30	25	90	110	50	192
38	32	90	110	58	240
57	36	90	138	66	354
76	38	85	138	76	469
95	40	90	138	84	584
114	44	95	145	92	700
122	45	100	154	95	748

TRIPLEX 3/4" PITCH					
No. Teeth	Bore		D _m	L	D _e
	d _{min}	d _{max}			
12	20	35	53	70	82
15	20	48	71	70	100
17	25	55	79	70	112
19	25	65	91	70	124
21	25	70	97	70	138
23	25	80	110	70	150
25	25	90	120	70	161
30	25	90	110	70	192
38	36	80	110	70	240
57	40	90	138	76	354
76	44	95	145	86	469
95	46	100	154	94	584
114	50	110	168	102	700
122	52	115	175	105	748

All dimensions are in mm

SPROCKETS FOR TRANSMISSION

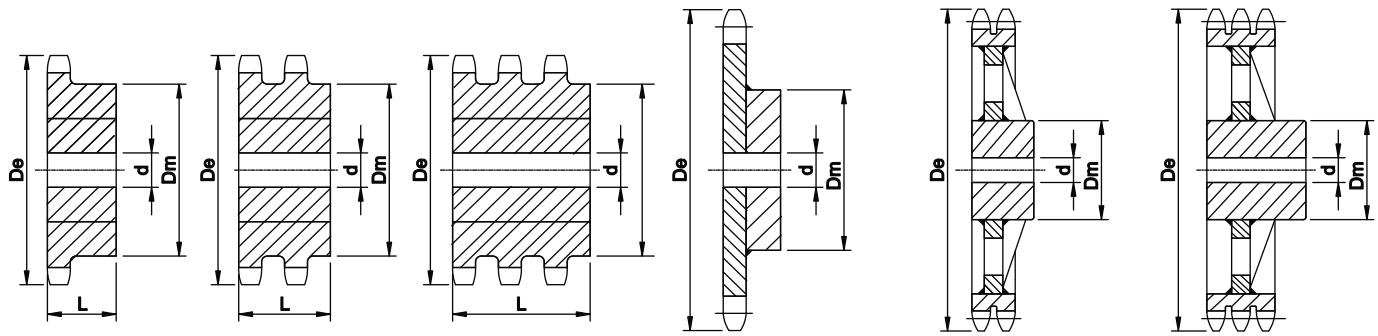

SOLID ONE PIECE SPROCKET

WELDED SPROCKET

FABRICATED SPROCKET

SPROCKETS for 1" (16B), 1 1/4" (20B), 1 1/2" (24B) & 1 3/4" (28B)

SIMPLEX 1" PITCH					
No. Teeth	Bore		D _m	L	D _e
	d _{min}	d _{max}			
12	20	45	67	38	109
15	20	60	84	38	134
17	20	60	90	42	149
19	25	60	90	42	164
21	25	60	90	42	184
23	25	60	90	42	199
25	25	60	90	42	215
30	25	65	100	45	256
38	32	70	110	45	320
57	36	80	125	45	473
76	38	85	134	45	626
95	44	95	150	45	780
114	48	105	170	50	933
122	50	110	175	50	998

DUPLEX 1" PITCH					
No. Teeth	Bore		D _m	L	D _e
	d _{min}	d _{max}			
12	20	48	72	70	109
15	20	65	92	70	134
17	25	75	107	70	149
19	25	85	123	70	164
21	30	80	110	70	184
23	30	80	110	70	199
25	30	80	110	70	215
30	30	80	110	70	256
38	36	90	125	76	320
57	46	100	140	90	473
76	48	110	150	102	626
95	54	110	150	114	780
114	58	130	175	124	933
122	60	130	175	130	998

TRIPLEX 1" PITCH					
No. Teeth	Bore		D _m	L	D _e
	d _{min}	d _{max}			
12	20	45	72	95	109
15	20	65	92	95	134
17	25	70	107	95	149
19	25	75	123	95	164
21	25	80	110	95	184
23	25	80	110	95	199
25	25	80	110	95	215
30	25	80	110	95	256
38	46	90	125	95	320
57	50	100	140	102	473
76	54	110	150	116	626
95	58	110	150	130	780
114	68	130	175	140	933
122	70	130	175	145	998

SIMPLEX 1 1/4" PITCH					
No. Teeth	Bore		D _m	L	D _e
	d _{min}	d _{max}			
12	20	55	88	45	138
15	20	70	133	45	168
17	25	70	100	50	188
19	25	70	100	50	208
21	30	70	100	50	230
23	30	70	100	50	251
25	30	75	110	50	270
30	30	85	125	50	320
38	36	85	125	50	401
57	40	90	135	50	592
76	50	100	150	60	784
95	50	110	170	60	976

DUPLEX 1 1/4" PITCH					
No. Teeth	Bore		D _m	L	D _e
	d _{min}	d _{max}			
12	25	55	90	80	138
15	25	85	120	80	168
17	30	85	120	80	188
19	30	85	120	80	208
21	30	105	140	80	230
23	30	105	140	80	251
25	30	105	140	80	270
30	30	115	150	80	320
38	50	100	156	100	401
57	50	110	165	110	592
76	60	120	188	120	784
95	64	130	205	130	976

TRIPLEX 1 1/4" PITCH					
No. Teeth	Bore		D _m	L	D _e
	d _{min}	d _{max}			
12	25	55	90	120	138
15	25	80	120	120	168
17	25	90	120	120	188
19	25	90	120	120	208
21	25	100	140	120	230
23	25	100	140	120	251
25	25	100	140	120	270
30	25	110	150	120	320
38	50	120	188	130	401
57	60	130	205	140	592
76	60	140	220	150	784
95	70	150	238	160	976

SIMPLEX 1 1/2" PITCH					
No. Teeth	Bore		D _m	L	D _e
	d _{min}	d _{max}			
12	25	70	102	50	161
15	25	80	105	50	200
17	25	80	105	55	222
19	25	80	105	55	246
21	30	80	105	60	274
23	30	90	120	60	298
25	30	90	120	60	322
30	30	90	120	60	382
38	50	105	145	75	478
57	50	110	150	75	707
76	60	125	175	75	937
95	60	130	180	75	1166

DUPLEX 1 1/2" PITCH					
No. Teeth	Bore		D _m	L	D _e
	d _{min}	d _{max}			
12	25	70	102	100	161
15	25	105	140	100	200
17	30	115	150	100	222
19	30	125	160	100	246
21	30	125	160	100	274
23	30	125	160	100	298
25	30	125	160	100	322
30	30	125	160	100	382
38	50	115	180	116	478
57	60	130	205	120	707
76	60	140	220	140	937
95	70	160	250	150	1166

TRIPLEX 1 1/2" PITCH					
No. Teeth	Bore		D _m	L	D _e
	d _{min}	d _{max}			
12	30	70	102	150	161
15	30	100	140	150	200
17	30	110	150	150	222
19	30	115	160	150	246
21	30	115	160	150	274
23	30	115	160	150	298
25	30	115	160	150	322
30	30	115	160	150	382
38	60	140	205	150	478
57	70	150	238	160	707
76	70	160	250	170	937
95	80	170	276	180	1166

SIMPLEX 1 3/4" PITCH					
No. Teeth	Bore		D _m	L	D _e
	d _{min}	d _{max}			
8	25	40	74	70	132
15	25	80	145	70	232
19	30	85	160	75	289
25	30	85	170	75	373
38	30	90	180	75	557
57	50	100	190	75	828
76	60	115	210	80	1096


DUPLEX 1 3/4" PITCH					
No. Teeth	Bore		D _m	L	D _e
	d _{min}	d _{max}			
8	25	40	74	120	132
15	25	80	145	120	232
19	30	85	160	120	289
25	30	100	180	120	373
38	40	110	200	120	557
57	50	125	220	130	828
76	70	135	240	140	1096

TRIPLEX 1 3/4" PITCH					
No. Teeth	Bore		D _m	L	D _e
	d _{min}	d _{max}			
8	25	40	74	190	132
15	25	80	145	190	232
19	30	85	160	190	289
25	30	100	180	190	373
38	40	110	200	200	557
57	50	125	230	220	828
76	70	135	250	240	1096

Sprocket for use with ANSI roller chain is produced to the same general dimensions but the teeth are specially machined to suit ANSI roller chain. Sprockets for ANSI roller chain will not fit on BS chain and vice-versa.

All dimensions are in mm

CHAIN-BS228/ISO606/DIN 8187

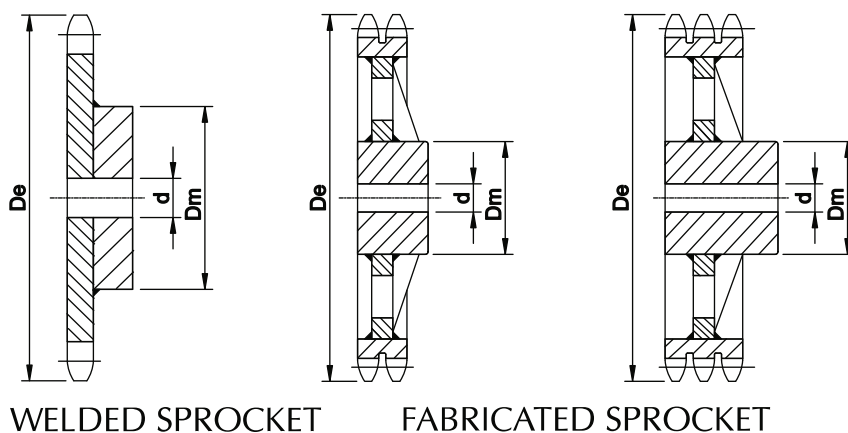

SPROCKETS for 2" (32B), 2 1/2" (40B) & 3" (48B)

SIMPLEX 2"PITCH					
No. Teeth	Bore		D _m	L	D _e
	d _{min}	d _{max}			
8	25	45	82	80	152
15	30	90	160	80	267
19	30	100	170	90	331
25	30	105	180	90	428
38	30	105	180	90	638
57	40	135	230	130	949
76	50	135	230	140	1255

DUPLEX 2"PITCH					
No. Teeth	Bore		D _m	L	D _e
	d _{min}	d _{max}			
8	30	45	82	120	152
15	30	90	160	120	267
19	30	115	200	120	331
25	30	115	200	120	428
38	40	130	220	140	638
57	50	130	240	150	949
76	60	150	260	160	1255

TRIPLEX 2"PITCH					
No. Teeth	Bore		D _m	L	D _e
	d _{min}	d _{max}			
8	25	45	85	135	152
15	30	90	160	135	267
19	30	115	200	135	331
25	40	115	210	140	428
38	40	130	220	140	638
57	50	130	240	150	949
76	60	150	260	160	1255

SIMPLEX 2 1/2"PITCH					
No. Teeth	Bore		D _m	L	D _e
	d _{min}	d _{max}			
17	60	130	275	90	376
19	60	150	300	95	414
21	60	155	350	95	459
25	60	100	200	95	541
38	70	120	240	130	802
57	80	130	270	145	1184
76	80	145	280	160	1566

DUPLEX 2 1/2"PITCH					
No. Teeth	Bore		D _m	L	D _e
	d _{min}	d _{max}			
17	60	130	275	140	376
19	60	150	300	140	414
21	70	155	350	150	459
25	70	130	260	160	541
38	80	130	280	160	802
57	80	140	290	180	1184
76	80	150	310	200	1566

TRIPLEX 2 1/2"PITCH					
No. Teeth	Bore		D _m	L	D _e
	d _{min}	d _{max}			
17	60	130	275	220	376
19	60	150	300	220	414
21	70	160	350	230	459
25	80	130	260	240	541
38	90	140	280	240	802
57	100	145	290	250	1184
76	100	155	310	250	1566


SIMPLEX 3"PITCH					
No. Teeth	Bore		D _m	L	D _e
	d _{min}	d _{max}			
17	70	160	340	105	449
19	70	170	380	105	497
21	70	200	400	105	552
25	70	200	400	105	646
38	80	200	400	180	960
57	90	200	400	200	1419

DUPLEX 3"PITCH					
No. Teeth	Bore		D _m	L	D _e
	d _{min}	d _{max}			
17	90	170	340	170	449
19	90	180	380	170	497
21	100	200	400	180	552
25	100	200	400	180	646
38	120	200	400	230	960
57	130	200	400	250	1419

TRIPLEX 3"PITCH					
No. Teeth	Bore		D _m	L	D _e
	d _{min}	d _{max}			
17	90	170	340	275	449
19	90	180	380	275	497
21	100	200	400	280	552
25	100	210	400	285	646
38	120	210	400	285	960
57	130	210	430	300	1419

All dimensions are in mm

Double Simplex Sprockets for $\frac{3}{8}$ " to $1\frac{1}{2}$ " Pitch Standard Roller Chains

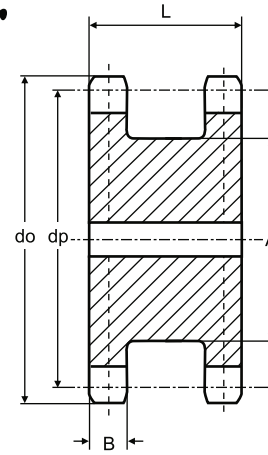

Sprocket Data

Chain No.	Tooth Width B
06B-1	6.35
08B-1	7.2
10B-1	9.2
12B-1	11.2
16B-1	16.2
20B-1	18.5
24B-1	24.1

Cat. No.	No. of Teeth	Pitch Circle Ø dp	Outside Ø do	Stock Bore d	Max Bore † d	Hub Diameter A	Length L	Approx. Weight kg
----------	--------------	-------------------	--------------	--------------	--------------	----------------	----------	-------------------

For $\frac{3}{8}$ " Pitch Chain No. 06B-1

DS06B1-14	14	42.80	46.3	10	20	31	23.5	0.17
DS06B1-15	15	45.81	49.3	10	23	34	23.5	0.20
DS06B1-16	16	48.82	52.3	10	25	37	23.5	0.23
DS06B1-17	17	51.83	55.3	10	27	40	23.5	0.27
DS06B1-18	18	54.85	58.3	10	29	43	23.5	0.31
DS06B1-19	19	57.87	61.3	10	31	46	23.5	0.35
DS06B1-20	20	60.89	64.3	10	33	48	23.5	0.39
DS06B1-21	21	63.91	68.0	10	35	52	23.5	0.45
DS06B1-23	23	69.95	73.5	10	38	58	23.5	0.55
DS06B1-25	25	76.02	80.0	10	43	64	23.5	0.67

For $\frac{1}{2}$ " Pitch Chain No. 08B-1

DS08B1-12	12	49.07	53.0	12	24	35	31	0.29
DS08B1-13	13	53.06	57.4	12	26	38	31	0.35
DS08B1-14	14	57.07	61.8	12	27	41	31	0.43
DS08B1-15	15	61.09	65.6	12	30	45	31	0.49
DS08B1-16	16	65.10	69.5	12	34	49	31	0.58
DS08B1-17	17	69.11	73.6	12	36	53	31	0.66
DS08B1-18	18	73.14	77.8	12	38	58	31	0.75
DS08B1-19	19	77.16	81.7	12	41	62	31	0.85
DS08B1-20	20	81.19	85.8	12	44	66	31	0.96
DS08B1-21	21	85.22	89.7	18	46	70	31	1.04
DS08B1-23	23	93.27	98.2	18	51	78	31	1.28
DS08B1-25	25	101.33	105.8	18	56	86	31	1.55

For $\frac{5}{8}$ " Pitch Chain No. 10B-1

DS10B1-12	12	61.34	68.0	19	30	45	36.5	0.55
DS10B1-13	13	66.32	73.0	19	34	50	36.5	0.66
DS10B1-14	14	71.34	78.0	19	36	55	36.5	0.80
DS10B1-15	15	76.36	83.0	19	40	60	36.5	0.94
DS10B1-16	16	81.37	88.0	19	43	65	36.5	1.11
DS10B1-17	17	86.38	93.0	19	46	70	36.5	1.25
DS10B1-18	18	91.42	98.3	19	50	75	36.5	1.43
DS10B1-19	19	96.45	103.3	19	54	80	36.5	1.62
DS10B1-20	20	101.49	108.4	19	58	85	36.5	1.81
DS10B1-21	21	106.52	113.4	19	60	90	36.5	2.02
DS10B1-23	23	116.58	123.4	19	65	100	36.5	2.47
DS10B1-25	25	126.66	134.0	19	72	110	36.5	2.97

For $\frac{3}{4}$ " Pitch Chain No. 12B-1

DS12B1-12	12	73.61	81.5	24	35	53	45	1.05
DS12B1-13	13	79.59	87.5	24	39	59	45	1.24
DS12B1-14	14	85.61	93.6	24	43	65	45	1.46
DS12B1-15	15	91.63	99.8	24	47	71	45	1.63
DS12B1-16	16	97.65	105.5	24	51	77	45	1.94
DS12B1-17	17	103.67	111.5	24	56	83	45	2.18
DS12B1-18	18	109.71	118.0	24	59	89	45	2.50
DS12B1-19	19	115.75	124.2	24	63	95	45	2.83
DS12B1-20	20	121.78	129.7	24	66	101	45	3.17
DS12B1-21	21	127.82	136.0	24	70	107	45	3.54
DS12B1-23	23	139.90	149.0	24	78	119	45	4.33
DS12B1-25	25	152.00	160.0	24	85	131	45	5.20

All dimensions are in mm



Cat. No.	No. of Teeth	Pitch Circle Ø dp	Outside Ø do	Stock Bore d	Max Bore † d	Hub Diameter A	Length L	Approx. Weight kg
----------	--------------	----------------------	-----------------	-----------------	-----------------	-------------------	-------------	----------------------

For 1" Pitch Chain No. 16B-1

DS16B1-12	12	98.14	109.0	25	47	72	63.5	2.50
DS16B1-13	13	106.12	117.0	25	54	81	63.5	3.13
DS16B1-14	14	114.15	125.0	25	58	88	63.5	3.75
DS16B1-15	15	122.17	133.0	25	64	97	63.5	4.36
DS16B1-16	16	130.20	141.0	25	69	104	63.5	5.00
DS16B1-17	17	138.22	149.0	25	75	113	63.5	5.78
DS16B1-18	18	146.28	157.0	25	80	121	63.5	6.56
DS16B1-19	19	154.33	165.2	25	86	129	63.5	7.40
DS16B1-20	20	162.38	173.0	25	90	137	63.5	8.29
DS16B1-21	21	170.43	181.2	25	96	145	63.5	9.21
DS16B1-23	23	186.53	197.5	25	108	161	63.5	11.18
DS16B1-25	25	202.66	213.5	25	116	177	63.5	13.38

For 1 1/4" Pitch Chain No. 20B-1

DS20B1-13	13	132.66	147.83	25	63	95	68	24.6
DS20B1-15	15	152.70	168.40	25	78	115	68	37
DS20B1-17	17	172.80	188.98	25	80	125	68	47.3
DS20B1-19	19	192.91	209.30	25	106	155	68	55
DS20B1-21	21	213.03	229.62	30	130	175	68	64
DS20B1-23	23	233.17	250.05	30	140	195	68	70


For 1 1/2" Pitch Chain No. 24B-1

DS24B1-13	13	159.20	172	25	60	109	88	54
DS24B1-15	15	183.25	196	25	70	133	88	73
DS24B1-17	17	207.35	221	25	80	157	88	91
DS24B1-19	19	231.48	245	30	90	181	88	105
DS24B1-21	21	255.63	270	30	100	205	88	117
DS24B1-23	23	279.80	294	30	115	230	88	130

Double Duplex Sprockets for 1" to 1 1/2" Pitch Standard Roller Chains

Sprocket Data

Chain No.	Pitch	B ₁	B ₂	e	e ₁
16B-2	1"	16.2	47.7	31.9	44
20B-2	1 1/4"	18.5	54.6	36.5	48
24B-2	1 1/2"	24.1	72.0	48.4	62

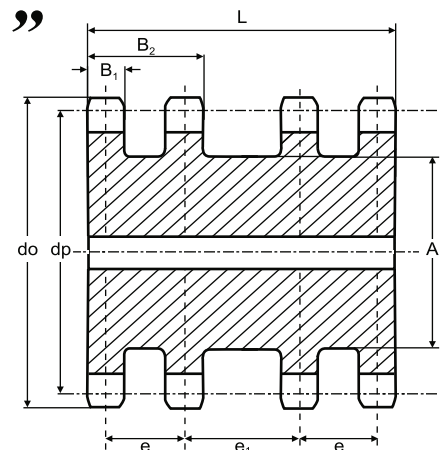

Cat. No.	No. of Teeth	Pitch Circle Ø dp	Outside Ø do	Stock Bore d	Max Bore † d	Hub Diameter A	Length L
----------	--------------	----------------------	-----------------	-----------------	-----------------	-------------------	-------------

For 1" Pitch Chain No. 16B-2

DD16B2-15	15	122.17	133.0	25	64	97	124
DD16B2-17	17	138.22	149.0	25	75	113	124
DD16B2-19	19	154.33	166.2	25	86	129	124
DD16B2-21	21	170.43	181.2	25	96	145	124


For 1 1/4" Pitch Chain No. 20B-2

DD20B2-15	15	152.70	168.4	25	78	115	140
DD20B2-17	17	172.80	188.9	25	80	125	140
DD20B2-19	19	192.91	209.3	25	106	155	140
DD20B2-21	21	213.03	229.6	30	130	125	140







For 1 1/2" Pitch Chain No. 24B-2

DD24B2-15	15	183.25	196	25	70	133	183
DD24B2-17	17	207.35	221	25	80	157	183
DD24B2-19	19	231.48	245	30	90	181	183
DD24B2-21	21	255.63	270	30	100	205	183

All dimensions are in mm



OTHER PRODUCTS

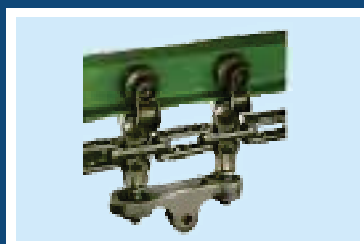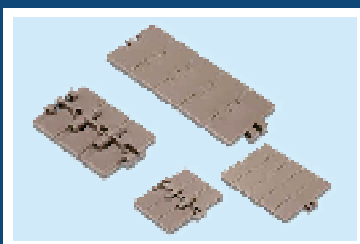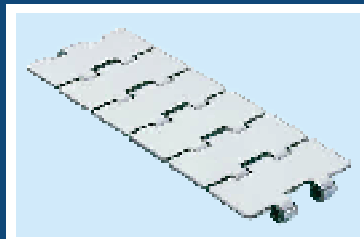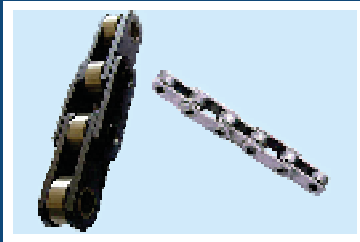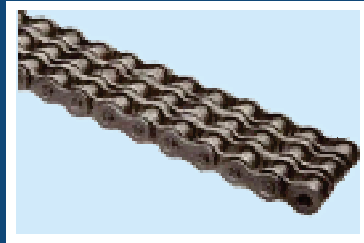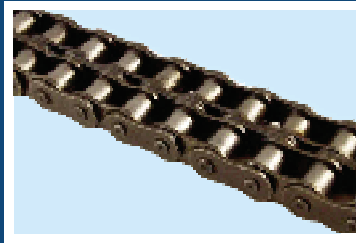

Distributed by



In accordance with the quality policy of Meritt Transmissions to constantly improve its products, specifications in this catalogue are subject to change without prior notice

Meritt
T.R.A.N.S.M.I.S.S.I.O.N.S

157/159, Narayan Dhuru Street,
Behind Nagdevi Street, Mumbai - 400 003. INDIA
Telephone : 2344 4956 / 2344 2857 / 2342 8342
Fax : 91-22-2341 4107 / 2407 8268

E-mail : sales@meritt.in
meritt2@vsnl.net

Web Site: www.meritt.in